





DIVERTER TECHNICAL DATAS

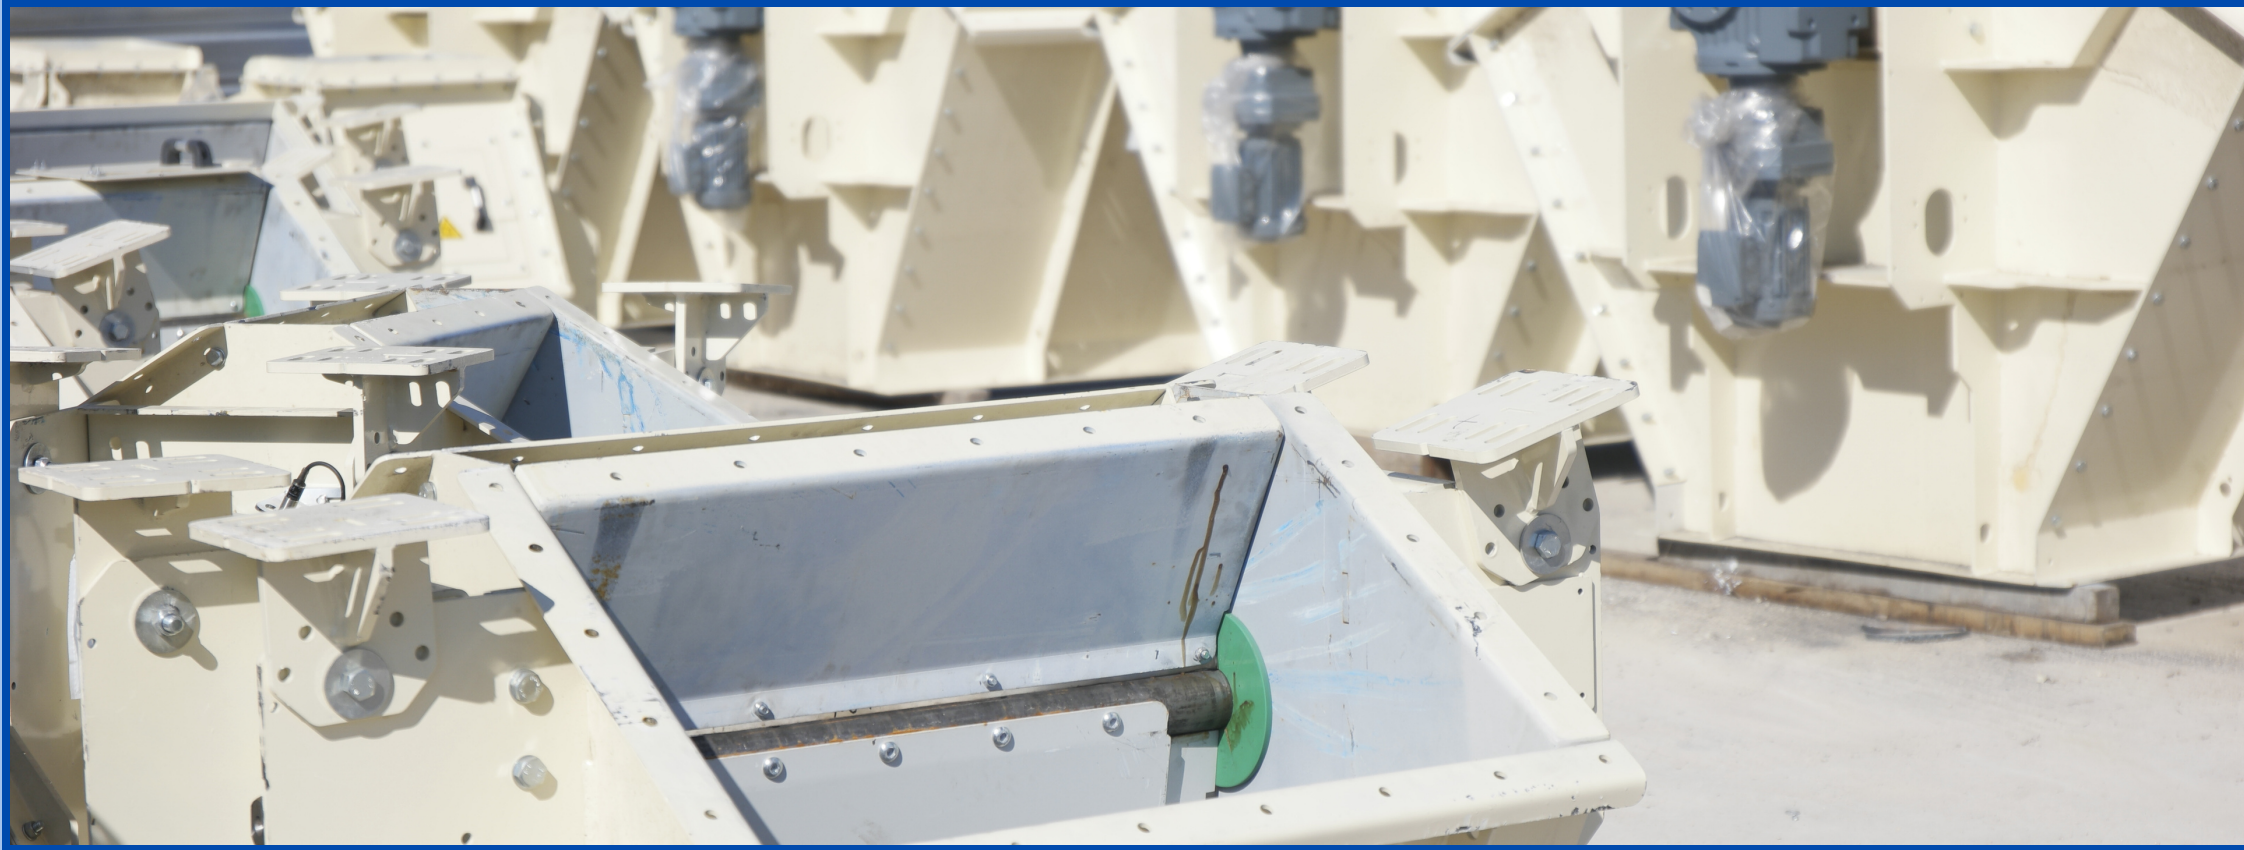

DIVERTERS

Diverters can direct the material flow in two or three directions, we have four different types of diverter which are manual controlled, pneumatic controlled, servo motor and geared motor controlled, in different measures and in two different manufacturing material types which are carbon steel and stainless steel.



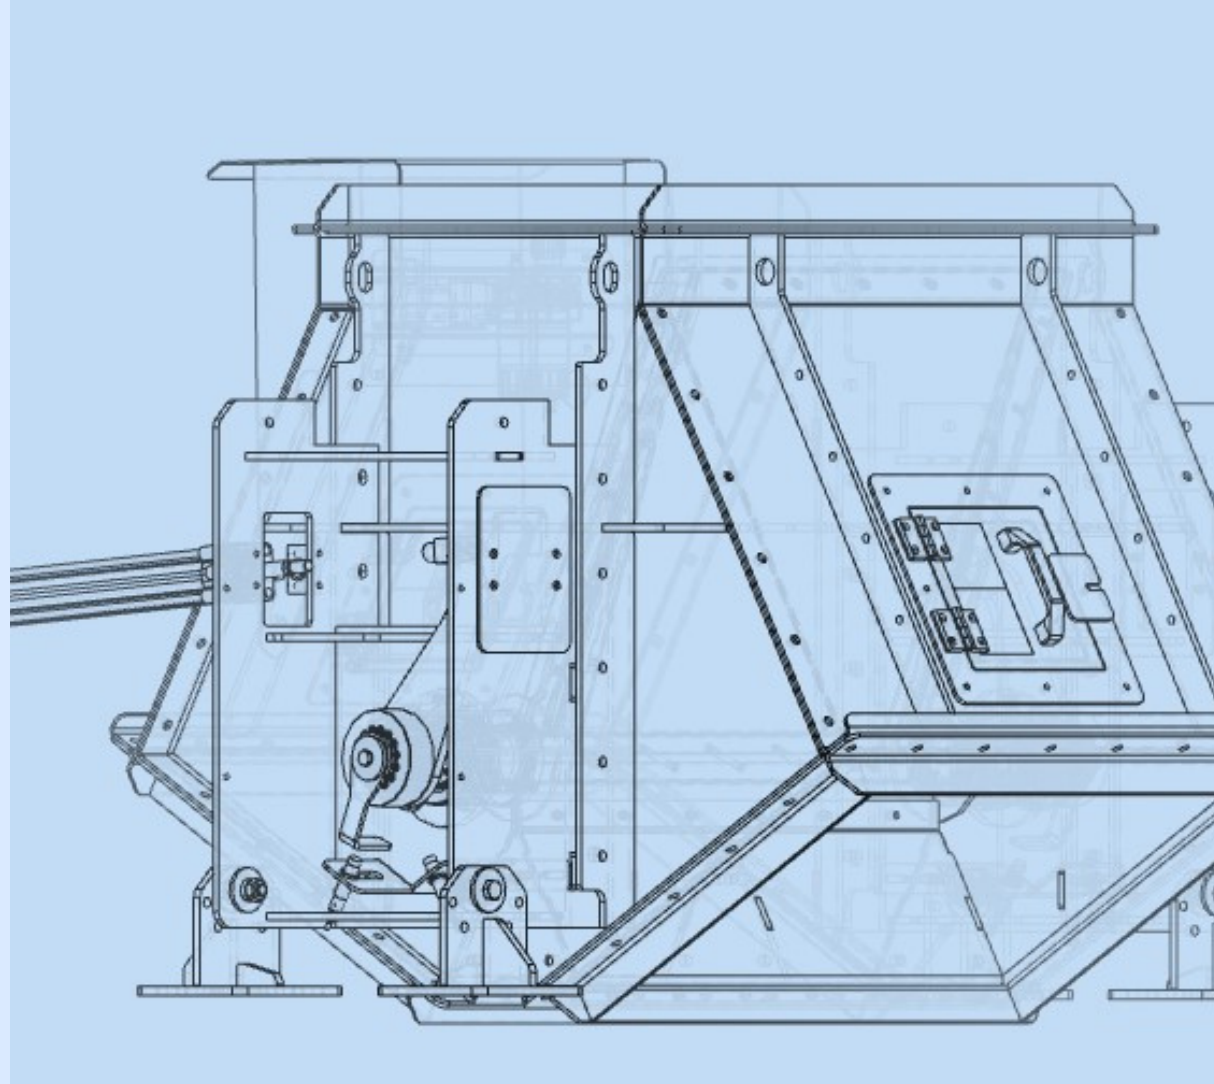

Diverters



Diverters Dimensions:	W 500 to W2000
Diverter Types:	2-way and 3-way version / symmetric and asymmetric
Types of drive:	Pneumatic, electrical, manual
Materials:	S235JR (St37), AISI 304
Side Wall Thickness:	4 mm to 6 mm
Standart Size:	500 mm x 500 mm up to 2000 mm x 2000 mm Special sizes up to 2000 mm x 2000 mm possible without problems
Standart Options:	Positioning sensor, Junction Box, Inspection Doors